

OPTIONS

- Kinedyne Sliding Winches / Track
- Stainless Steel Wheel Liners
- Aluminum Wheels
- Extra Tool Boxes
- Spare Tire/Wheel
- Oil Bath Hubs
- 12,000 Lb. Axles
- Electric / Hydraulic Brakes



Steel Wheels (Standard)



Stainless Steel Wheel Liners



Aluminum Wheels



CROSSMAN TRAILER

ALUMINUM TRAILERS



BEAVERTAIL

Model LAGN 25+5BT
25' Main Deck and 5' Beavertail
Aluminum Non-Skid Floor



STRAIGHT DECK

Model LAGN 40FD



SPARE TIRE STOWAGE

Tucked Away in the top of the Gooseneck, Easy Access and Stays Clean until needed



KINEDYNE SLIDING WINCHES

Kinedyne Sliding Winches on Track
with 5500 lb. Load Rating Each.




CROSSMAN TRAILER

114 Cheyenne Ave | Alliance Nebraska 69301
308-761-0483 | FAX 877-762-9779

www.crossmantrailer.com | sales@crossmantrailer.com

Owner, Mark Tolstedt, former Director of Livestock and Gooseneck Engineering at Wilson Trailer Company, has 27 years of Design and Manufacturing experience. Bringing you a Premium Quality, Superior Load-Handling Flatbed.

Note: All specifications, dimensions and illustrations are based on the most current design at the time of publication. All rights are reserved to make changes to specifications and design without notice or obligation.

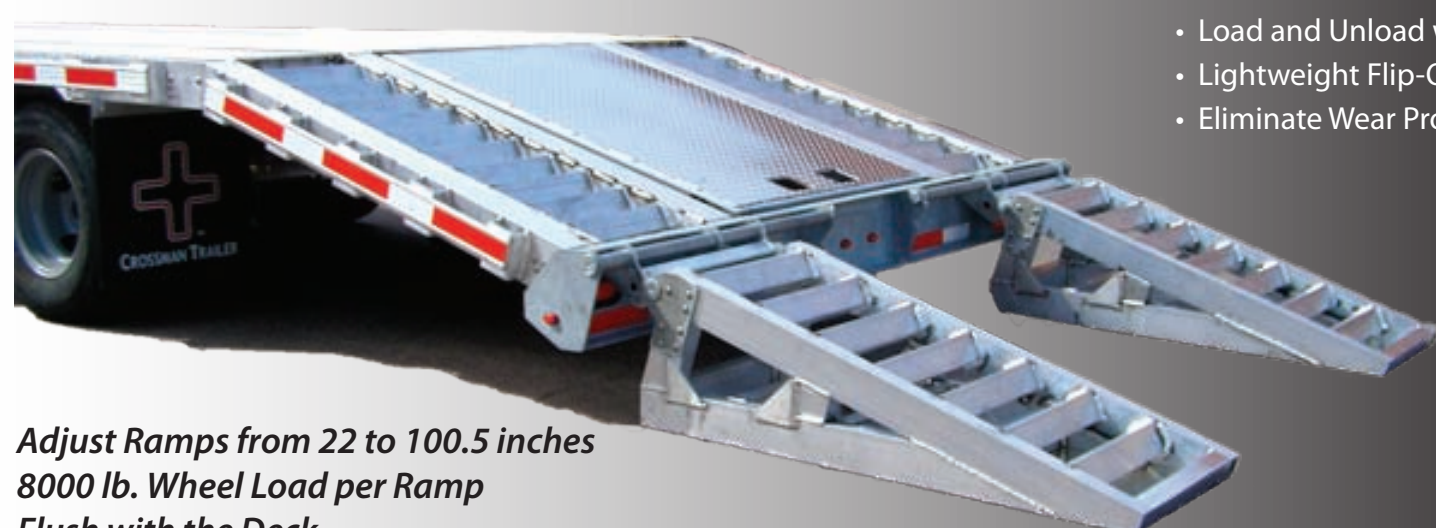

- Load and Unload with Ease
- Lightweight Flip-Over Ramps
- Eliminate Wear Prone Springs

Adjust Ramps from 22 to 100.5 inches
 8000 lb. Wheel Load per Ramp
 Flush with the Deck

BEAVERTAIL TRAILERS *Center Pop-Up and 2 Lightweight Flip-Over Ramps*

LAGN 20+5 BEAVERTAIL *Tough and Dependable*
 25 Foot OBL, 5650 lbs.

LAGN 25+5 BEAVERTAIL *Best Selling Model, Versatile*
 30 Foot OBL, 5900 lbs.

LAGN 30+5 BEAVERTAIL *Haul Hay, Antique Tractors*
 35 Foot OBL, 6240 lbs.

LAGN 35+5 BEAVERTAIL *Equipment or Hay Hauling*
 40 Foot OBL, 6580 lbs.


SPECIFICATIONS STANDARD

Gross Vehicle Weight Rating 25,000 lb. GVWR
 Axles - (2) 10,000 lb. Each
 Adjustable Coupler - 30,000 lb.

Wheels - 16x6, 8 on 6.5" Centers, Gray Steel Dual Grease Hubs
 Radial Tires - ST235/80R16 LRE
 Spare Tire and Wheel - *Optional*

Rub Rail - 5.5" Semi-Trailer Grade Side Rail
 Stake Pockets - 16" Centers
 Flooring - Extruded Aluminum, Non-skid Finish

Grote Lights - Semi-Trailer Grade
 Mid-Turn Signal Light

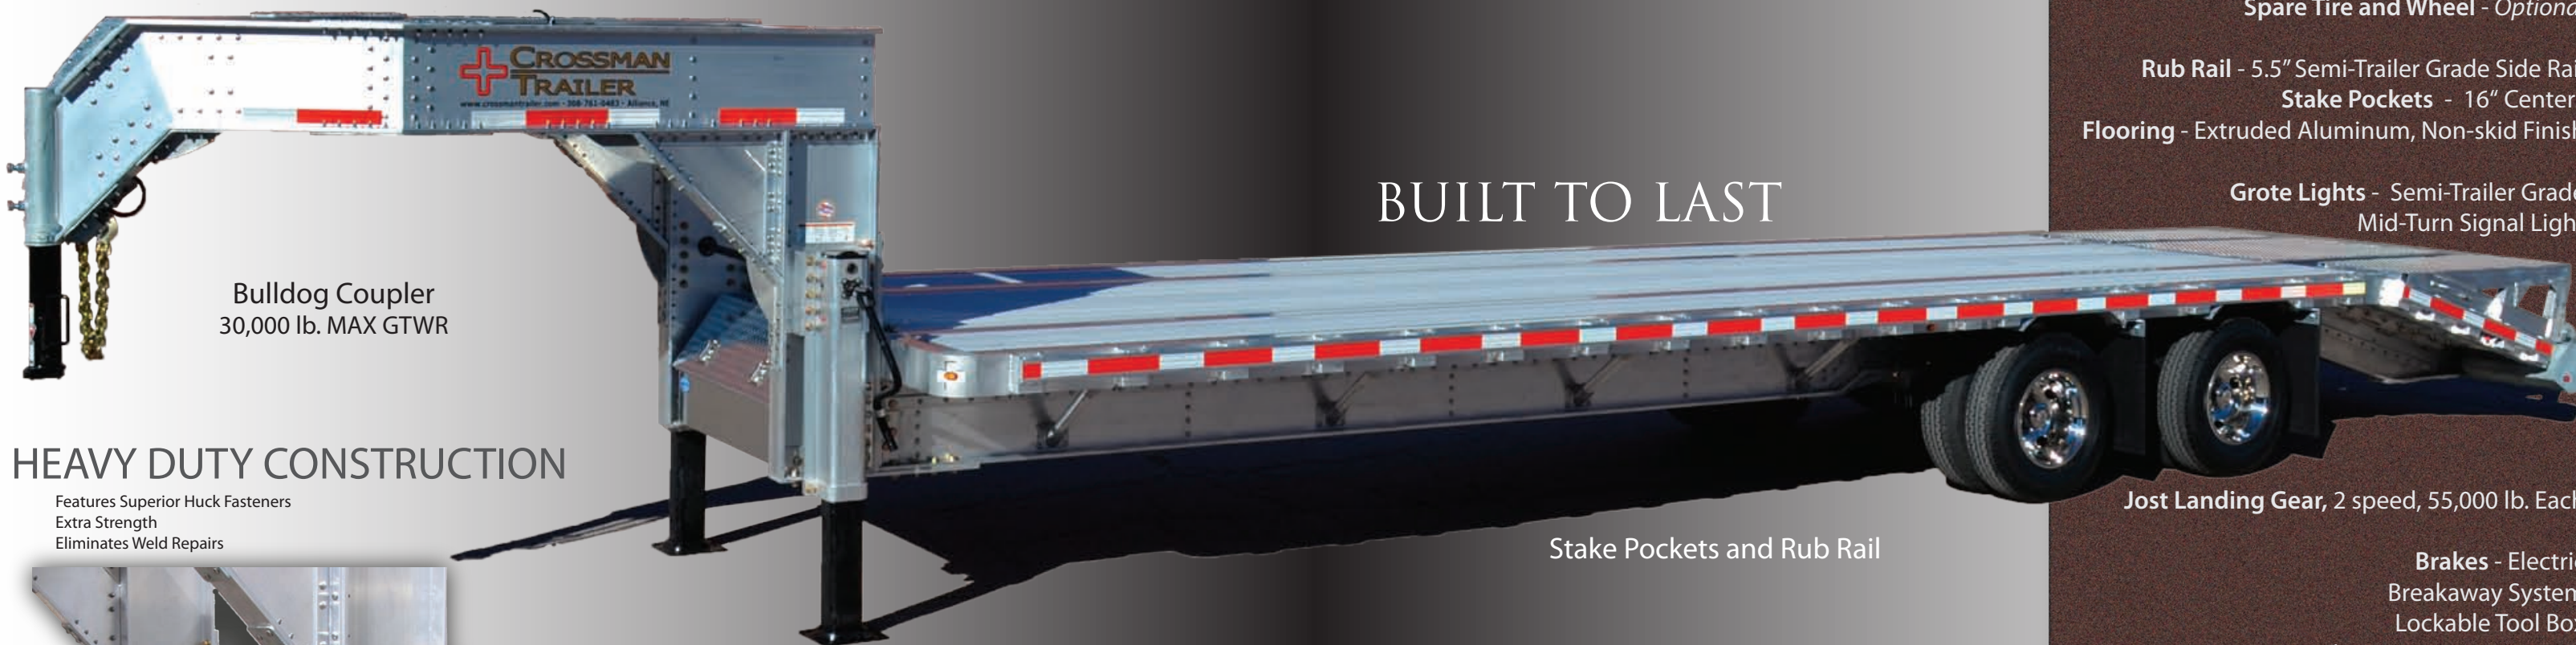

BUILT TO LAST

Bulldog Coupler
 30,000 lb. MAX GTWR

HEAVY DUTY CONSTRUCTION

Features Superior Huck Fasteners
 Extra Strength
 Eliminates Weld Repairs



Aluminum Tool Box
 Durable Galvanized Steel Reinforcement

Stake Pockets and Rub Rail

Jost Landing Gear, 2 speed, 55,000 lb. Each

Brakes - Electric Breakaway System
 Lockable Tool Box
 Superior Huck Fastener Construction

Overall Length (OAL) of a LAGN25+5: 39'10"
 (Includes Gooseneck)
 Overall Width (OAW) 8'6"
 Overall Height (OAH) 6'10"

BEAVERTAIL MODELS
 Dual Flip Over Ramps - Aluminum
 Ramp Width - 26.5 in.
 Adjustable Ramps from 22 to 100.5 inches
 Center Pop-Up Section

Non-Skid Aluminum Flooring

Meets or Exceeds NATM Standards

CONSTRUCTION

Engineered Aluminum Extrusions
 19" Tall Main Beams
 13.9" Tall Gooseneck Beams
 4" Semi-trailer Grade Crossmembers on 16" Centers

"Crossman Trailer designs are based on proven semi-trailer construction. Their durability is unmatched. If you're looking for the top-of-the-line trailer then look no further."
 Mark Tolstedt, Owner, Crossman Trailer Inc.

STRAIGHT DECK TRAILERS

LAGN 25 FD *Amazing Fuel Savings*
 4950 lbs.

LAGN 30 FD *Great for Feed or Seed*
 5350 lbs.

LAGN 35 FD *Favorite with Hay Haulers*
 5750 lbs.

LAGN 40 FD *Haul Hay, Pallets of Feed*
 6100 lbs.

Weights Based on Standard Tires, Wheels And Axles.
 OBL - Overall Bed Length
 Add 9'10" Gooseneck Length for OAL

AlumiLightX, Jost's AX100 - Aluminum Hybrid Landing Gear

Rated Lift Capacity 55,000 lbs.

Designed to be Durable, Lightweight and Corrosion Resistant. To reduce weight, the upper leg is manufactured from Extruded Aluminum and features a Heavy-Duty Reinforced Strap for Superior Side Load Strength.