



793D Extra Quiet XQ Mining Truck



Machine configuration for use in areas of the world that require restricted sound levels

SPECIFICATIONS

Engine

Engine Model	Cat® 3516B HD EUI	
Rated Power	1,750 rpm	
Gross Power – SAE J1995	1801 kW	2,415 hp
Net Power – SAE J1349	1743 kW	2,337 hp
Net Power – ISO 9249	1743 kW	2,337 hp
Net Power – 80/1269/EEC	1743 kW	2,337 hp
Torque Rise	23%	
Bore	170 mm	6.7 in
Stroke	215 mm	8.5 in
Displacement	78 L	4,760 in ³

- Power ratings apply at 1,750 rpm when tested under the specified condition for the specified standard.
- Ratings based on SAE J1995 standard air conditions of 25° C (77° F) and 99 kPa (29.61 Hg) dry barometer. Power based on fuel having API gravity of 35 at 16° C (60° F) and an LHV of 42 780 kJ/kg (18,390 Btu/lb) when engine used at 30° C (86° F).
- No engine derating required up to 2750 m (9,000 ft) altitude.
- **NOT** compliant with U.S. Environmental Protection Agency Tier I emissions standards.

Weights – Approximate

Gross Machine Operating Weight	383 749 kg	846,000 lb
Chassis Weight	115 502 kg	254,638 lb
Body Weight Range	21 795 – 54 431 kg / 48,050 – 120,000 lb	

- Chassis weight with 100% fuel, hoist, body mounting group, rims and tires.
- Body weight varies depending on how body is equipped.

Operating Specifications

Nominal Payload Capacity	218 tonnes	240 tons
Body Capacity (SAE 2:1)	129 m ³	169 yd ³
Maximum Capacity Custom		
Top Speed – Loaded	54.3 km/h	33.7 mph
Steer Angle	36°	
Turning Radius – Front	28.42 m	93 ft 3 in
Turning Circle Clearance Diameter	32.66 m	107 ft 2 in

- Body Capacity (SAE 2:1) with Dual Slope Body.
- Refer to the Caterpillar® Mining Truck 10/10/20 Overload Policy for maximum gross machine weight limitations.

Transmission

Forward 1	11.8 km/h	7.3 mph
Forward 2	15.9 km/h	9.9 mph
Forward 3	21.5 km/h	13.4 mph
Forward 4	29 km/h	18.1 mph
Forward 5	39.4 km/h	24.5 mph
Forward 6	54.3 km/h	33.7 mph
Reverse	10.9 km/h	6.8 mph

- Maximum travel speeds with standard 40.00-R57 tires.

Final Drives

Differential Ratio	1:8:1
Planetary Ratio	16:1
Total Reduction Ratio	28.8:1

- Planetary, full-floating.

Suspension

Effective Cylinder Stroke – Front	130.5 mm	5.2 in
Effective Cylinder Stroke – Rear	105.5 mm	4.2 in
Rear Axle Oscillation	±4.9°	

Brakes

Outside Diameter	874.5 mm	34.5 in
Brake Surface – Front	89 817 cm ²	13,921 in ²
Brake Surface – Rear 1	34 500 cm ²	20,847 in ²
Standards	J-ISO 3450 JAN88, ISO 3450:1996	

- Gross Machine Operating Weight is 383 749 kg (846,000 lb).

Body Hoists

Pump Flow – High Idle	846 L/min	224 gal/min
Relief Valve Setting – Raise	20 370 kPa	2,955 psi
Body Raise Time – High Idle	20.25 Seconds	
Body Lower Time – Float	19.26 Seconds	
Body Power Down – High Idle	17.51 Seconds	

- Twin, two-stage hydraulic cylinders mounted inside main frame; double-acting cylinders in second stage.
- Power raise in both stages; power down in second stage.
- Automatic body-lower modulation reduces impact on frame.

SPECIFICATIONS

793D Extra Quiet XQ Mining Truck

Weight Distributions – Approximate

Front Axle – Empty	46%
Rear Axle – Empty	54%
Front Axle – Loaded	33%
Rear Axle – Loaded	67%

Capacity – Dual Slope – 100% Fill Factor

Struck	96 m ³	126 yd ³
Heaped (SAE 2:1)	129 m ³	169 yd ³

Service Refill Capacities

Fuel Tank	4354 L	1,150 gal
Fuel Tank (optional)	4922 L	1,300 gal
Cooling System	973 L	257 gal
Crankcase	265 L	70 gal
Rear Axle Housing	1022 L	270 gal
Steering Tank	227 L	60 gal
Steering System (Includes Tank)	341 L	90 gal
Brake/Hoist Hydraulic Tank	769 L	203 gal
Brake/Hoist System (Includes Tank)	1375 L	363 gal
Torque Converter/Transmission Sump	102 L	27 gal
Torque Converter/Transmission System (Includes Sump)	189 L	50 gal

ROPS

ROPS Standards

- ROPS (Rollover Protective Structure) for cab offered by Caterpillar meets ISO 3471:1994 ROPS criteria.
- FOPS (Falling Objects Protective Structure) meets ISO 3449:1992 Level II FOPS criteria.

Sound

Sound Standards

- The operator sound pressure level measured according to work cycle procedures specified in ANSI/SAE J1166 MAY90 is 76 dB(A) for cab offered by Caterpillar, when properly installed and maintained and tested with doors and windows closed.
- The exterior sound pressure level for the standard machine measured at a distance of 15 m (49 ft) according to the test procedures specified in SAE J88 APR95, mid-gear moving operation is 89 dB(A).
- Hearing protection may be needed when operating with an open operator station and cab (when not properly maintained or doors/windows open) for extended periods or in a noisy environment.
- The exterior sound power level for the standard XQ configuration is 113 dB(A) using the prevailing Australian Hunter Valley/Caterpillar sound testing procedure.
 - Tested on a dynamic 10% slope uphill loaded

Steering


Steering Standards	SAE J15111 OCT90, ISO 5010:1992
--------------------	------------------------------------

- Gross Machine Operating Weight is 383 749 kg (846,000 lb).

Tires

Standard Tire 40.00R57

- Productive capabilities of the 793D truck are such that, under certain job conditions, TKPH (TMPH) capabilities of standard or optional tires could be exceeded and, therefore, limit production.
- Caterpillar recommends the customer evaluate all job conditions and consult the tire manufacturer for proper tire selection.

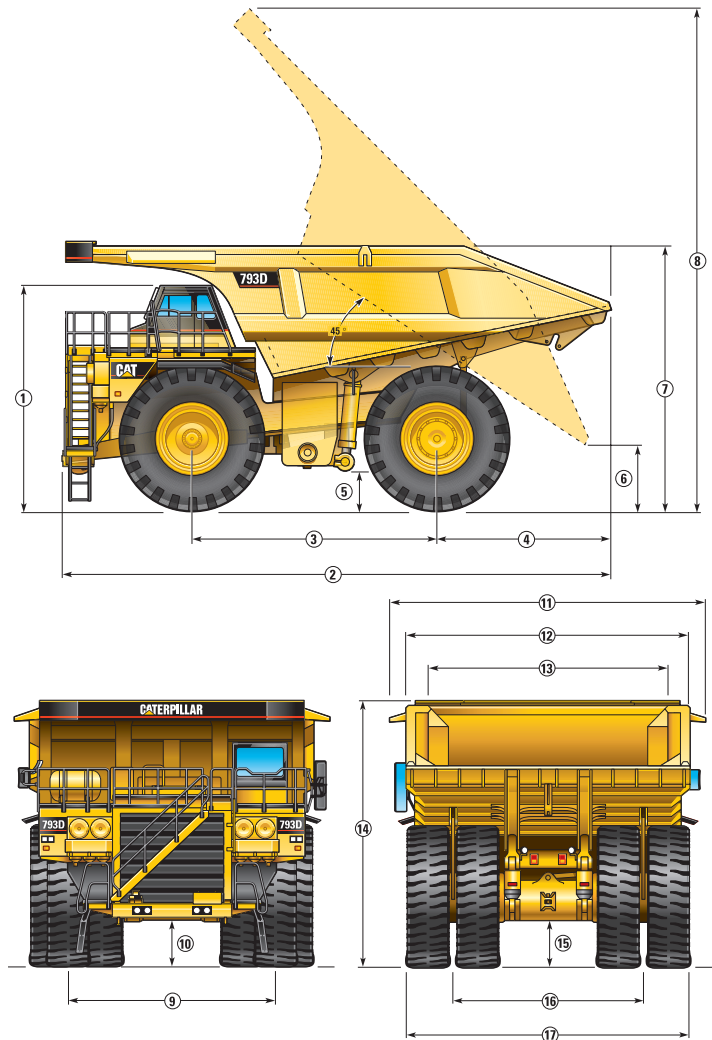

Dimensions

All dimensions are approximate. Shown with MSD II Body.
Dimensions are with Dual Slope Body.

1	Height to Top of ROPS	5584 mm	18 ft 4 in
2	Overall Length	13 205 mm	43 ft 4 in
3	Wheelbase	5905 mm	19 ft 5 in
4	Rear Axle to Tail	3772 mm	12 ft 5 in
5	Ground Clearance	1005 mm	3 ft 4 in
6	Dump Clearance	1364 mm	4 ft 6 in
7	Loading Height – Empty	5871 mm	19 ft 4 in
8	Overall Height – Body Raised	13 113 mm	43 ft 1 in
9	Centerline Front Tire Width	5610 mm	18 ft 5 in
10	Engine Guard Clearance	1189 mm	3 ft 11 in
11	Overall Canopy Width	7680 mm	25 ft 3 in
12	Outside Body Width	6940 mm	22 ft 10 in
13	Inside Body Width	6500 mm	21 ft 4 in
14	Front Canopy Height	6494 mm	21 ft 4 in
15	Rear Axle Clearance	1128 mm	3 ft 8 in
16	Centerline Rear Dual Tire Width	4963 mm	16 ft 3 in
17	Overall Tire Width	7605 mm	24 ft 12 in

