



ADT SERIES

# 1233 ADT



## MOST POPULAR ADT

The K-Tec™ 1233 ADT is designed for self loading with a 40-ton, 400+ horsepower rock truck. The 1233 ADT offers more power to the ground with the functionality from an existing rock truck unit. It features fast hydraulics, a smooth ride, and joystick scraper control.



# 1233 ADT SPECIFICATIONS


General Specifications	Standard	Metric
Heaped Capacity (ISO)	36 Cubic Yards	27.5 Cubic Metres
Struck Capacity	20.25 Cubic Yards	15.5 Cubic Metres
Max Loading Rating	86,500 lbs	39,235 kgs
Bucket Dimensions	12' W x 4' 3" H x 12' 10" L	3.66m W x 1.29m H x 3.91m L
Cutting Width	14'	4.27m
Cutting Edge	3-Piece Blade	3-Piece Blade
Gate Opening	80"	2.03m
Rack Height (Tiltable)	4'	1.21m
Gate Cylinders	5" x 26"	127mm x 711mm
Lift Cylinders	5.5" x 32"	140mm x 813mm
Ejector Cylinder	5.5" x 76"	140mm x 1,930mm
Transport Cutting Edge Clearance	28"	0.71m
Ball To Rear Axle Length	28' 9"	8.77m
Wrap Around Mud Scrapers	Standard	Standard
Gate Extension	Standard	Standard
Radial Tires (4)	26.5 R25	26.5 R25

## K-Tec Scraper Features



Optional Upgrades	
Brake System	4 caliper disc brakes
Truck Fender System	Protects truck from material flinging from tires
Truck Chassis Catwalk System	Easy access steps and platform
Mine Version	Heavier plate steel for mining applications

## Recommended Power Units

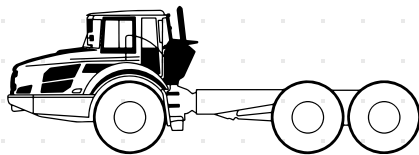

400HP +/298 KW + Articulated Dump Truck

Transportation Measures	Standard	Metric
Overall Width	14'	4.27m
Overall Height	10'	3.04m
Overall Length	36' 6"	11.13m
Shipping Weight	40,545 lbs	18,390 kgs

Specifications are subject to change without notice.

## Gallery

Clay / Illinois, USA



Sand / Al Lith, Saudi Arabia



Topsoil / Montana, USA



Sand + Clay / Colorado, USA



Topsoil / Queensland, Australia



Clay / Manitoba, Canada



Gypsum Rock / Oklahoma, USA

